

## Technical Data Sheet

|                              |                                 |                                       |                           |
|------------------------------|---------------------------------|---------------------------------------|---------------------------|
| <b>Revision Date</b>         | 25 June 2015                    |                                       |                           |
| <b>Multisorb Part Number</b> | <b>Product Name</b>             | <b>Description</b>                    | <b>Manufacturing Site</b> |
| 02-02091CG11                 | Natrasorb® S Tyvek®<br>One Unit | Granular Silica Gel in printed Tyvek® | Buffalo, New York USA     |

### MATERIALS OF CONSTRUCTION

|                   |                 |                     |                       |
|-------------------|-----------------|---------------------|-----------------------|
| <b>Components</b> | Uncoated Tyvek® | Granular Silica Gel | Ink (21 CFR Part 175) |
|-------------------|-----------------|---------------------|-----------------------|

### PHYSICAL ATTRIBUTES


| Attribute                  | Specification          | Comments   |
|----------------------------|------------------------|--|
| <b>Weight</b>              | 1 Unit                 | Unit of Adsorption as Defined in MIL-D-3464.   |
| <b>Length</b>              | 6.00" ± 0.14"          | 152.40mm ± 3.56mm  |
| <b>Width</b>               | 1.50" ± 0.03"          | 38.10mm ± 0.76mm   |
| <b>Adsorption Capacity</b> | MIL-D-3464             | A Unit weight of desiccant will adsorb at least 2.85 grams of moisture at 20% R.H. @ 25°C and 5.70 grams of moisture at 40% R.H. @ 25°C. |
| <b>Printing</b>            | Military Specification | Product Line Name, Description, Manufacturer, Unit Size.   |

### PACKAGING, LABELING, PRODUCT STORAGE, AND SHELF LIFE

| Attribute              | Specification   | Comments                            |
|------------------------|---|-------------------------------------|
| <b>Quantity</b>        | 300 desiccant packets   | Per foil liner with a HIC per case. |
| <b>Labeling</b>        | Manufacturer's CAUTION label on the case.   |                                     |
|                        | Manufacturer's name, description of desiccant, quantity per container, part number, and control number. |                                     |
| <b>Product Storage</b> | Recommended storage in a non-condensing environment.<br>Avoid temperatures above 90°F (32°C).           |                                     |
| <b>Shelf Life</b>      | 3 years from date of manufacture when stored in original unopened packaging.                            |                                     |

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

StripPax General Dimensions:  
Refer to Technical Data Sheet 1  
for current specifications.

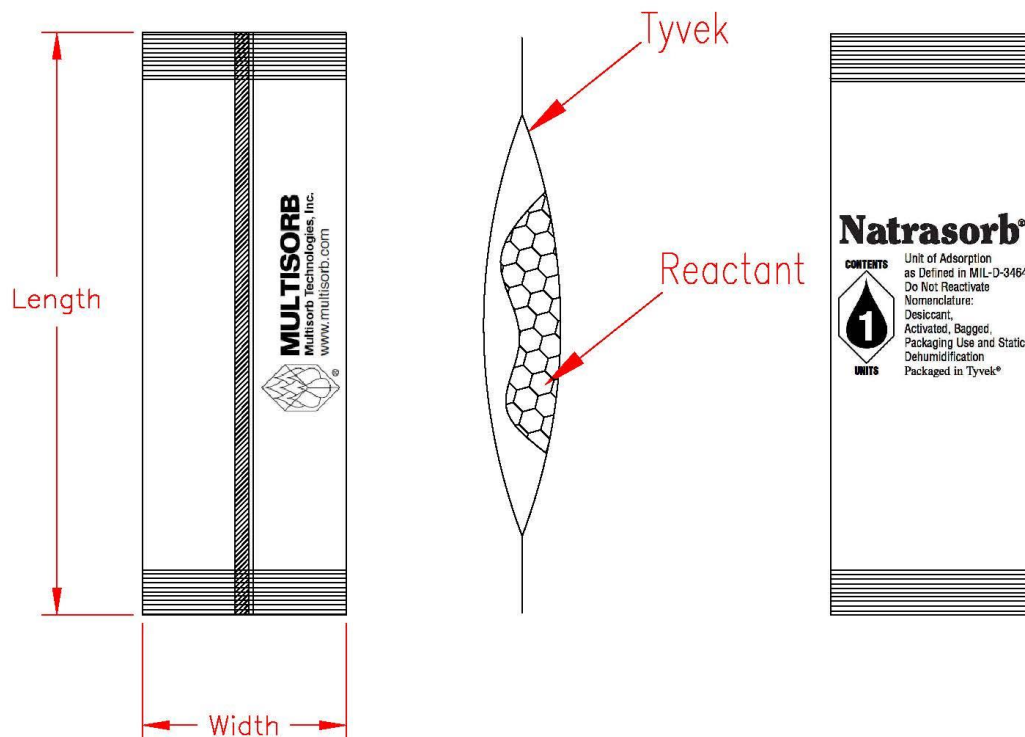

NOTE: Color may not be exactly as shown.

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.