



# SPECIFICATION SHEET

## 9100-2170D



### 12.5 cal/cm<sup>2</sup> DUAL CERTIFIED COVERALL

- HRC2, ATPV 12.5 cal/cm<sup>2</sup>
- NFPA 2112-2012
- UL Certified
- Aramid high tenacity FR thread
- No metal pieces on the garment
- Bar-tacked at all stress points
- Protective stand-up collar with hook & loop closure
- Storm guard with hook & loop closure
- Action back for mobility
- Side elasticized waist
- FR rib knit cuffs
- Hook & loop on bottom
- 2 waist patch pockets with side access

### STANDARDS MET

- NFPA 1975-2009, NFPA 2112-2012
- NFPA 70E 2012, ASTM F 1506-2010a
- CAN/CGSB 155.20-2000, CAN/CGSB 155.22-97
- OSHA 29 CFR 1910.269
- EN ISO11611:2008, EN ISO11612:2008, EN ISO14116:2008

### APPLICATIONS

- Electrical & Utilities
- Petrochemical, Gas & Oil
- Mining
- Welding
- Emergency Services

### CARE INSTRUCTIONS


Machine wash warm, 165° F max. Tumble dry low. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

### TECHNICAL DATA

MATERIAL	FR twill weave. 90% Cotton/10% Nylon
CONSTRUCTION	9oz FR twill weave. 90% Cotton/10% Nylon.
COLOR	■ Navy (9100-2170D)
SIZES	S - 4X
PACKAGING	1/Polybag, 18/Case
CASE	22" x 16" x 16" / 56cm x 41cm x 41cm
CASE WEIGHT	53 lbs / 24 kg
COO	China
HARM CODE	6211.32.0010

### BARCODES

ITEM	BAG	BOX	CASE
■ 9100-2170D/S	616314132629	---	02616314132627
■ 9100-2170D/M	616314132636	---	02616314132634
■ 9100-2170D/L	616314132643	---	02616314132641
■ 9100-2170D/XL	616314132650	---	02616314132658
■ 9100-2170D/2X	616314132667	---	02616314132665
■ 9100-2170D/3X	616314132674	---	02616314132672
■ 9100-2170D/4X	616314132681	---	02616314132689

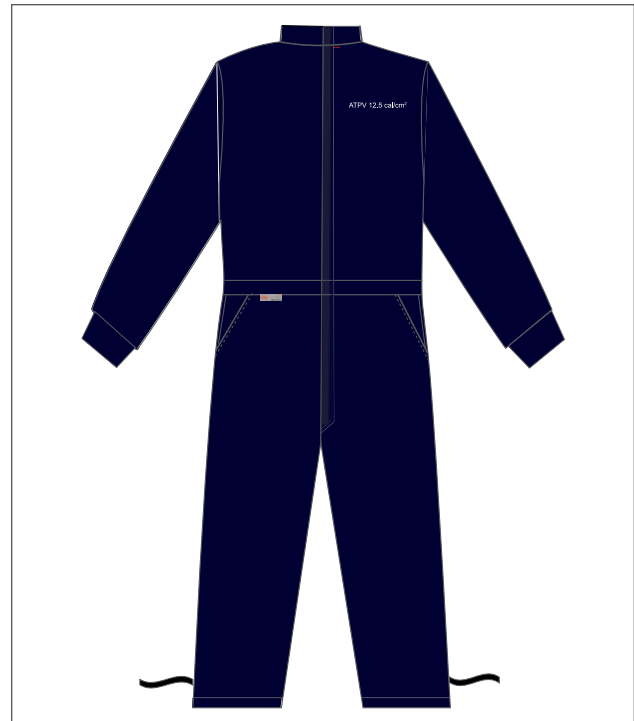

### DIMENSIONS (in)

	S	M	L	XL	2X	3X	4X
<b>A</b>	36-38	40-42	44-46	48-50	52-54	56-58	60-62
<b>B</b>	32-34	36-38	40-42	44-46	48-50	52-54	56-58
<b>C</b>	34.5	35.5	36.5	38	39.5	41	42.5
<b>D</b>	32	32	32	32	32	32	32

